

Automatic License Plate Recognition - A review

¹Jimmy Goyal, ²Sukhwinder Singh

¹Student, ²Mentor

¹²Department of Electronics and Electrical Communication Engineering

¹²PEC University of Technology, Chandigarh, India

Abstract: At present scenario in every nation, the identification of a vehicle's owner as well as control of traffic has become the major problem. The owner and vehicle identification becomes necessary to track the user who violates the rules of traffic or driving too fast in more people's area. With the use of manual traffic control process, it is highly impossible to track those owners those are breaking the traffic rules and punish them. Thus to automate this process and catch the real owner of driven vehicle, we need to have computerized system which can able to catch the current activities and able locate the license plate number using different image processing techniques. This automated system of recognizing the license plate number of moving vehicle is called as License Plate Recognition (LRP) system or Automatic Number Plate Recognition (ANPR) system.

Keywords: License Plate, License plate recognition, image acquisition, image preprocessing, character segmentation, character recognition.

1. Introduction

In every country, for each vehicle one unique number is allocated for the identification of that vehicle and its owner. The systems like ANPR or LPR playing very crucial role in real life applications such as parking payment, traffic controlling, catching the vehicle which breaks the traffic rules, stolen cars etc. The adaptations of such automated systems are very advantageous as well as reduce many overheads as compared to traditional manual systems. The process of LRP is consisting of complex tasks such as preprocessing, license plate detection, character segmentation and character recognition. This process becomes more complex while working with number plate images at different angels and noises. As this process is usually works under the real life environments, thus this needs to be fast as well as accurate. Many of the LPR system are minimizing the complexity by putting some constraints over the distance and position of camera for vehicle and its inclined angles. If we consider different angles and views of cameras, then the recognition rates increases significantly and hence the LPR system becomes stronger. With this addition there some other features using which we can increase the accuracy of LPR system. In this paper we are presenting the survey over LPR or ANPR system, and explaining it's every step with different methods. In section II we are discussing the different phases included for LPR with survey of different methods presented for them.



Fig 1: Automatic license plate recognition

2. Survey of license plate recognition methods

In this section we are taking the detailed review of complete automated system for vehicle number recognition. In this section we are presenting each step of this system and different methods used for it.

2.1 Image Acquisition: This is the first phase of LPR system in which the input is given to the next phases. These images are taken directly from the videos or cameras. The quality of such images is based on the quality of cameras. Hence it's always better if we have good quality cameras in place for capturing the images live. The images are always in different sizes, different orientations and directions etc.



Fig 2: Automatic license plate recognition

2.2 Image Preprocessing: This is the phase in which the quality of input image is improved using the different methods. The preprocessing step is having many methods which are used to improve the images quality, to minimize the shadows, as well as to remove the noises from images. Due to this process, the accuracy of LPR system is improved. In this section we study the different algorithms those are used for preprocessing are discussed. Computation locally adaptive thresholding is used to convert a gray scale image to a binary image. The value of threshold mainly depends on the local statistics like range, variance and surface fitting parameters. In the case of badly illuminated areas, calculated threshold value will be low. Although locally adaptive thresholding method cannot completely compensate the loss of information, it at least preserves the information that may be lost when using a constant binarization method.. To minimize the processing time, the original image is Acquire downsampled to 120 columns by preserving the original aspect ratio. Main advantage of gray scale top hat transform is that it enhances the hot region by differentiating the front and background while weakening the other regions at the same time. Image de-noising is applied to remove noises in the images. In this procedure, subtle fractures can be linked and tiny abrupt changes can be softened. The main aim of this technique is to prevent the destruction of image edges, to retain the image outline and lines as much as possible, increasing the contrast between the ROI and other regions. Each pixel of the original image is compared with these threshold values to convert it to a binary image.



Fig 3: Automatic license plate recognition

2.3 Detection of License Plate: Once after the preprocessing step, the next is to detect the license plate from vehicle image. LPs (License Plates) are located by means of horizontal and vertical projections through search window. If the LP is not found using the above method then the original image is inverted. Since LPs are located at the bottom part of the image, projection histograms are scanned from the bottom to the top so that the height of the LP can easily be

identified. After performing the horizontal segmentation, vertical projection is carried out. In the location procedure, vertical Sobel edge features are primarily extracted. Then a skeleton extraction algorithm on edge map is performed. There is a possibility that dense pixels are text region and isolated edge pixels are often noises. So density based region growing method is used to locate candidate LP regions.

There are two types of connectivity:- 4 and 8 connectivity. The region with maximum area is considered as a possible license plate region and this region is forwarded to the segmentation process. But, two detection methods are performed. One is detection of white frame and another one is detection of black characters.

White frame is detected using CCL technique and it is sensitive to the edges. So if the frame is broken, the LP cannot be located properly. To determine the candidate frames, aspect ratio of the LP, 70 height and width of characters have to be known. Further, the penetration times through the midline of the large numerals in the LP is also calculated for candidate frame selection. In [4], after the successful CCL on the binary image, measurements such as orientation, aspect ratio, Euler number for every binary object in the image are calculated. Criteria such as orientation < 35 degrees, $2 < \text{aspect ratio} < 6$ and Euler number > 3 are considered as candidate plate regions. But this method does not guarantee that LP with dark background and white characters will be successfully detected. The author framed some rules to explain about the LP and gave some membership functions for fuzzy and vertical plate positions. But this need is very sensitive to the LP color and brightness. It also takes longer processing time compared to conventional color based methods. In [6], vertical edge detection method is utilized for locating the edges. There will be many abrupt intensity changes but a cluster of 10-15 sharp intensity changes is considered as plate zone. Image is convolved with horizontally oriented rank-filter of $M \times N$ pixels. This leads to a bright elongated spot of ellipsoidal. The last step is horizontal projection. After applying the Sobel edge detection method certain rules have been applied to locate the LP area. The first criterion is to find the column range of LP. Second step is to detect row range. After these steps, license plate will be obtained. So, to eliminate some candidate, the pseudo license plate aspect ratio of each candidate region is calculated. A combination of Hough transform and counter algorithm is applied to detect the LP region. First the counter algorithm is applied to detect the closed boundaries of objects. These counter lines are transformed to Hough coordinate to find intersected parallel lines that are considered as LP candidates. Counter and Hough transform method. To filter out the candidate plates, the aspect ratio of the LP and the horizontal cross cuts are used. In the case of number of horizontal cross cuts for 1 row plate is in the range of 4 to 8. For 2 row plate, it is in the range of 7 to 16.



Fig 4: Automatic license plate recognition

Skew Correction: It is not possible to take pictures without any tilt. So for successful recognition of license plate, tilt correction has to be performed after LPD. Skew correction is performed using Randon Transform (RT). But this RT method has a large computation cost. So to reduce the cost, RT is replaced by faster Hough transform. A new skew correction is developed with high speed of operation, high accuracy and simple structure. Both the horizontal and vertical correction is done.

2.4 Segmentation of Characters: After detection license plate, the next process is to do the segmentation characters. Character segmentation is the procedure of extracting the characters from the LP image. Almost all the papers that had been surveyed. Vertical and horizontal scanning is used to dig out the characters. Vertical scanning will scan the image vertically from [0, 0] to [height, width] which is executed on column by column basis. Width between the first and last column is computed and each character is separated from the plate background and stored in separate array so that it is used for horizontal scanning. Horizontal scanning is performed to eradicate the extra upper and lower region from the image. Different methods are used for character segmentation. Firstly, a gray-level quantization and morphology analysis are performed to obtain the candidate characters.

2.5 Recognition of Character: This is the final step of this system is recognition of characters. Almost all LPR systems are using different types of Artificial Neural Network (ANN). So neural networks based on organized feature maps is implemented in to handle noisy, deformed, broken, or incomplete characters acquired from LPs that were bent

and/or tilted with respect to the camera. This method focused on accuracy at the cost of increased complexity and execution speed. The success rate for character identification, in a large set of 1061 LPs in various viewpoints (combinations of angle and distance) is around 95.6%. During character recognition, once an unknown character is classified as one of the characters in the ambiguity set, an additional minor comparison between the unknown character and the classified character is performed. The comparison then focused only on the non ambiguous parts.

These types of neural networks can be designed and trained faster, as the hidden-layer neurons are defined by the number of the training patterns and are only trained once. PNN for LPR is first introduced in an early version of an LPR system where two PNNs, i.e., one for alphabet recognition and the other for number recognition, are trained and tested. The recognition rates reported in the literature are very encouraging when PNNs are trained and tested in noisy, tilted, and degraded patterns. The Optical Character Recognition (OCR) system is a two layer PNN with a topology of 108-180-36 nodes, whose performance for entire plate recognition reached 89.1%. The 26 vertical and 50 horizontal projections of the normalized 26×50 pixel license plate image are fed into 76 input nodes of BPNN. This network also comprises of 85 hidden nodes and 6 output nodes. Most license plate characters are successfully recognized by BPNN. However, characters such as B and 8, 1 and I, 8 and B, and O and D may be hard to distinguish using the neural network. A straight line is posted to the character as the base line to respectively accumulate the number of white pixels at the upper and lower left corners. The recognition rate is 97.3%.

Support Vector Machine (SVM) is used for character recognition. Before training and testing, features are extracted using Local-Direction Contributivity Density (L-DCD) and Global-Direction Contributivity Density (G-DCD). Compared to neural networks, SVM has less misclassification rate. Template matching method is used for character recognition. Each segmented character is matched with the stored template. Priority is assigned for each template. Template matching method is used for character recognition. Each segmented character is matched with the stored template. Priority is assigned for each template. When matching is performed, first the highest priority template is compared and if a match occurs the lowest priority templates are ignored. Number templates are assigned higher priorities because chances of occurrences of alphabets are less than the numbers.

An ordinary SOM has the following two layers: 1) an input layer and 2) a computation layer. The computation layer has the processing units. The weight matrix of the SOM is calculated during the learning phase. The hardware designed calculates the hamming distance between the weight matrix of each neuron and the input image and makes a decision on the output character. The recognition rate is 90.93%. 2 types of template matrix or feature vectors are extracted: Object Thinned Representation (OTR) and Characteristics Background Spots (CBS). OTR represents the character shape. CBS reflect the map of the image background within character bounding box. Postprocessor is responsible for refining recognition results by making use of the specific LP context.



Fig 5: Automatic license plate recognition

3. Conclusion and Future Work

In this review paper we addressed that LPR system is consisting of four main steps for identification of owner of vehicle. The first step is camera image acquisition, the quality of this images is depends on the selected of cameras and its features. The next second phase is extraction of license plate from the input preprocessed image. This extraction is basically done based on features like color, boundary, or characters existence. The third step is segmentation of extracted license plate, in this phase characters are extracted using their color information, using labeling or by template matching method. The fourth and final step is recognition of characters which done using template matching or by using the classifiers like fuzzy rules, ANN or SVM. As we discussed all this phases in this review paper, the concept of Automatic license plate recognition is becomes more complex in case there are different angels of vehicle images and

different conditions. Thus for the future work we suggest to work on improved LPR in which different conditions as well as angles of vehicles are considered for recognition of license plate of vehicle.

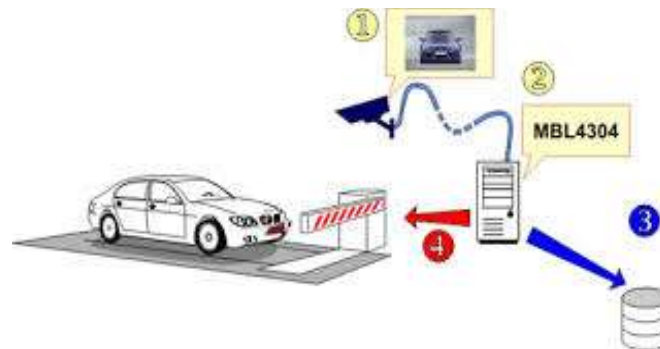


Fig 6: Automatic license plate recognition

References

- [1]. Kaushik Deb, Ibrahim Kahn, Anik Saha, and Kang-Hyun Jo, "An Efficient Method of Vehicle License Plate Recognition Based on Sliding Concentric Windows and Artificial Neural Network," *Procedia Technology*, vol. 4, pp. 812-819, 2012.
- [2]. A Albiol, L Sanchis, and J.M Mossi, "Detection of Parked Vehicles Using Spatiotemporal Maps," *IEEE Transactions on Intelligent Transportation Systems*, vol. 12, no. 4, pp. 1277-1291, 2011.
- [3]. Christos Nikolaos E. Anagnostopoulos, Ioannis E. Anagnostopoulos, Vassili Loumos, and Eleftherios Kayafas, "A License Plate-Recognition Algorithm for Intelligent Transportation System Applications," pp. 377-392, 2006.
- [4]. H. Erdinc Kocer and K. Kursat Cevik, "Artificial neural networks based vehicle license plate recognition," *Procedia Computer Science*, vol. 3, pp. 1033-1037, 2011.
- [5]. Xin Fan and Guoliang Fan, "Graphical Models for Joint Segmentation and Recognition of License Plate Characters," *IEEE Signal Processing Letters*, vol. 16, no. 1, pp. 10-13, 2009.
- [6]. Wenjing Jia, Huaifeng Zhang, and Xiangjian He, "Region-based license plate detection," *Journal of Network and Computer Applications*, vol. 30, no. 4, pp. 1324-1333, November 2007.
- [7]. Yang Yang, Xuhui Gao, and Guowei Yang, "Study the Method of Vehicle License Locating Based on Color Segmentation," *Procedia Engineering*, vol. 15, pp. 1324-1329, 2011.