

Effect of Exhaust Gas Recirculation on A CRDI Engine Powered By Diesel-Biodiesel Blends

Onteddu Srinivas¹, P V S Muralikrishna², K. Siva Satya Mohan³

¹M.Tech, Aditya College of Engineering & Technology

²Sr. Assistant Professor, Aditya College of Engineering & Technology

³Associate Professor, Aditya College of Engineering & Technology

ABSTRACT

The profound study of investigation made on effects of EGR on emissions at high fuel injection pressure in Common Rail Direct Injection engine which is a latest technology used in the global market widely. In this study fuel injection pressure is considered as 900 bar at constant engine speed as 1500 rpm, this high fuel injection pressure is used for fine atomization which supports combustion. Cotton seed biodiesel is prepared physically by mixing methanol 20% by volume and used KOH as catalyst by 0.5% by weight to attain better effects. The experimentation is conducted by considering B10 and B15 as blends. Simultaneously at each blend EGR percentage is varied as 10%, 15%, 20% and 25%. In this study load is varied as 20%, 40%, 60%, 80%, and 100%. The maximum load is considered as 3.7KW. As world taking steps to adopt global norms, reduction in emission plays very prominent and crucial role. Major part of research is already being done on reducing emissions. In this study major focus is kept on reducing NO_x percentage by increasing EGR percentage. Eventually graphs like BSFC, BTE, NO_x, CO₂, HC, Smoke Density and Exhaust gas temperature are plotted. In this study we found that maximum percentage of NO_x is reduced at full load and unburnt hydrocarbons increased to an extent as an effect of EGR. As cotton seed biodiesel has low calorific value, high density and high viscous effected combustion which lead to gradual reduction in the break thermal efficiency.

INTRODUCTION

The spectacular invention on this planet is internal combustion engine shortly abbreviated as IC Engine. These engines brought up grand revolution and made transportation much flexible and easier. Internal combustion engines ruled roads of this planet in motion from one place to other. The first person to invent commercial IC engines is ETIENNE LENOIR in 1859. Sir Nicholas Otto is the first person to invent moderate internal combustion engine in 1876. As the invention of wheel brought the revolution in 500BC apt to that internal combustion engine brought same revolution in present day scenario till date. As the name suggest internal combustion it is quite clear that combustion takes place inside the cylinder that is in combustion chamber of internal combustion engine. Internal combustion engine has reciprocating mechanism

As the definition of internal combustion engine mentions that the device which converts chemical energy into mechanical energy is termed as IC engines. Here chemical energy in the sense fuel energy or fuel power. The fuel is combusted in presence of filtered atmospheric air on combusting this mixture heat is liberated thus it just get converted into mechanical energy by reciprocating mechanism. Majorly internal combustion engines take natural gas, extracted petroleum products such as gasoline and diesel as their fuel. The emission in internal combustion engines are as NO_x, Sox, carbon monoxide and unburned hydro carbons etc. The challenging task of present day scenario is reducing emissions by altering the old technology with newly and moderate technology like Exhaust Gas Recirculation. The principle on which internal combustion engine operates is reciprocating mechanism. Otto cycle and Diesel cycle are the two cycles on which majority of internal combustion engine works. Petrol engine works on Otto cycle and Diesel engine operates on Diesel cycle. High speed engines operates on duel cycle. The present work is use of EGR to reduce emissions in CRDI engine by taking biodiesel blends to increase the break thermal efficiency.

LITERATURE SURVEY

Faster depletion of fossil fuels coupled with an increase in emissions leads to exploration of innovative and alternative technologies globally (Pramanik 2003). The high viscosity of biodiesel leads to problems in atomization, air fuel mixture formation and vaporization (Tanzer et al. 2014, Purusothaman 2014). According to this study, the sodium methoxide of 1.00 wt.%, reaction time of 60 min, reaction temperature of 55^oC and methanol to oil ratio of 6:1 could

be the most favourable conditions for lowest kinematic viscosity and high yield percentage of biodiesel. The biodiesel derived from wide variety of feedstocks such as jatropha, pongamia, karanja, fish oil, etc., and their blends with diesel has been investigated by various researchers globally. Cotton seed oil biodiesel as a diesel substitute was investigated by so many researchers. The B20 blend of cotton-seed biodiesel and diesel with the additive CeO₂ could reduce emissions in diesel engine (Durairaj et al. 2017). The recent investigations on biodiesel preparation from waste cooking oil determine the optimal conditions for obtaining lowest kinematic viscosity (3.91 cSt) and high yield percentage of biodiesel (98.19%) (Gülüm, Yesilyurt and Bilgin 2020). Naga Sarada et.al. (2010) conducted experiments in a diesel engine with cotton seed oil biodiesel-diesel blends at different injection pressures ranging from 180 to 240 bar and reported that at 210 bar of FIP the performance of the engine was better. Alcohols in particular due to their superior fuel characteristics such as higher calorific value and cetane number can be more promising in diesel engines. The oxygenated additive 1-heptanol in diesel-biodiesel blends reduced CO and HC emissions when compared to pure diesel, with an increase in NO_x emissions (Murat 2020). Cetane number is actually a measure of a fuel's ignition quality. Ignition delay periods of higher cetane fuels are shorter than that of lower cetane fuels in a particular diesel engine (Rao et al. 2009)

Higher proportion of NO_x emissions is another disadvantage associated with biodiesel (Jagadish, Puli and Murthy 2011). Two different shapes, namely rounded nozzle and sharp edged nozzle were typically used in CRDI engines. The sharp edged nozzles can be preferred at lower injection pressures while at higher injection pressures, round edged nozzles are more suitable (Prabhakar et al. 2013). CRDI system assisted diesel engine using diesel-biodiesel blends with aluminium oxide nanoparticles reduced specific fuel consumption and both HC and smoke emissions significantly. The concentration of HC and smoke emissions for the diesel-biodiesel blends without aluminium oxide nanoparticles were 13.459 g/kW-h and 79 HSU, whereas they were 8.59 g/kW-h and 49 HSU respectively with the addition of nanoparticles (Indrareddy, Venkateswarlu and Ramakrishna 2020).

EXPERIMENTAL DETAILS

The experimentation conducted on common rail direct injection engine which contains variables as variable compression ratio, usage of different blended fuels such as cotton seed biodiesel and azoles biodiesel etc, variable fuel injection pressure, variable fuel injection timing and variable speed at different loads as well. The considerations made in this experimentation or design of experiments are compression ratio is made to be constant that 17.1:1 in engine. Cotton seed biodiesel is considered as fuel in certain proportions like B10, B15 etc. The latest technology that is Exhaust Gas Recirculation is used and percentage on inclusion of exhaust gas in varied like 10%,15%,20%,25% etc to perform the experimentation in the laboratory. In common rail direct injection engine we have



Fig: 1 Practical experimental setup on which experiment is conducted.

Fuel injection pressure increased till 900 bar to 1000 bar by which this high pressure injection better the performance of the engine with best atomization technique. Thus after conducting experimentation calculations are made based on mathematical approach through which specific fuel consumption, thermal efficiency, and emissions graphs are plotted.

Engine Specification:

Table 1: Specification of CRDI engine

S.no	Specification	Value
1	Engine	Kirloskar AV1
2	Engine type technology	Common rail direct injection
3	Break power	3.7 KW
4	Mean effective radius	0.195 m
5	Bore diameter	87.5 mm
6	Stroke length	110 m
7	Injection pressure	900 bar
8	Injection timing	-23°(before TDC)

Water cooled eddy current dynamometer is used as loading device in the experimentation as shown in the experimental setup photo.

Formulation:

Fuel consumption

$$1) \quad fc = \frac{10}{t_{avg}} \times sg \times \text{density of water} \times 10^{-6} \times 3600 \quad \frac{kg}{hr}$$

sg indicates specific gravity.

$$2) \quad SFC = \frac{fc \quad kg}{BP \quad kw \quad hr}$$

SFC Indicates specific fuel consumption.

BP Indicates break power of the engine.

$$3) \quad FP = \frac{fc \times cv}{3600} \quad kw$$

FP Indicates fuel power

C_v Indicates calorific value of the fuel.

$$4) \quad \eta = \frac{BP}{FP} \times 100.$$

η_{th} Indicates thermal efficiency

Mathematical formulae used in the calculation are above. These methodical formulae have its own way to define the specification with its units. In common rail direct injection engine due to the effect of fuel injection pressure well atomization takes place in the combustion chamber through which it leads to increase in fuel efficiency. Thus eventually calculations are made and respective graphs are plotted in sheet, through which analysing is done on the performance and emissions of the engine.

Common rail direction injection is governed by electronic control unit and it is communicated through linking ECU to a laptop. Multecuscan is software through communication between engine control unit and research scholar is maintained in almost best way.

RESULTS AND DISCUSSION

After completion of all the experimentation and mathematical calculation graphs are plotted on varying load percentage as shown below, graphs like break thermal efficiency, break specific fuel consumption and emissions like nitrogen oxide, carbon monoxide, unburned hydrocarbons, smoke density exhaust gas temperature etc, blends are B10, B15 with varying EGR percentage like 10%, 15%, 20%, 25% etc. Thus eventually graphs are plotted and analysis done as shown below.

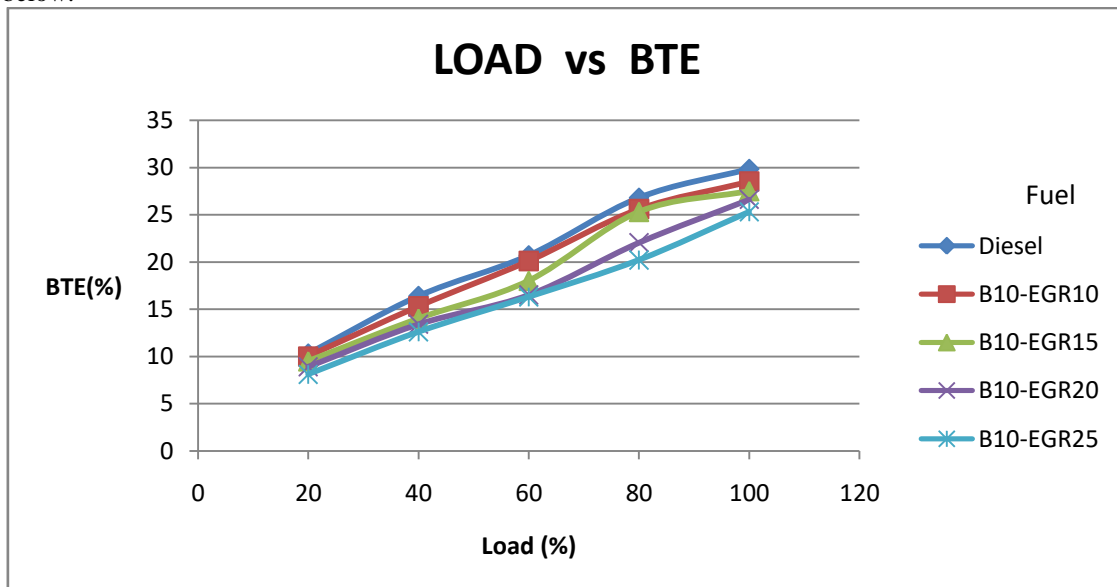


Fig 2: LOAD vs BTE

From the above graph one can analyse that as percentage of EGR increased then drop in thermal efficiency is found. From calculation it is about 21.2% of thermal efficiency found drop at full load condition.

Similarly the graph plotted with B15 and varying EGR percentage, the below graph is plotted between load and break thermal efficiency and analysis is done as drop in efficiency is found in graphical representation.

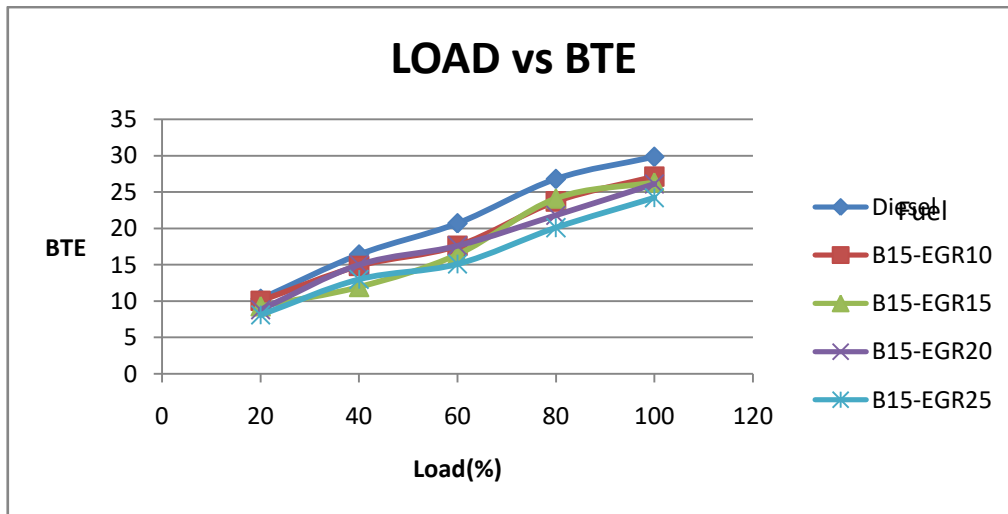


Fig 3: LOAD vs BTE

From the above graph one can analyse that as percentage of EGR increased then drop in thermal efficiency is found. From calculation it is about 21.2% of thermal efficiency found drop at full load condition. As the effect of biodiesel and EGR percentage the combustion in combustion chamber got affected to an extent as result drop in efficiency is found. Similarly the graph plotted with B15 and varying EGR percentage, the below graph is plotted between load and break specific fuel consumption and analysis is done as drop in break specific fuel consumption is found in graphical representation.

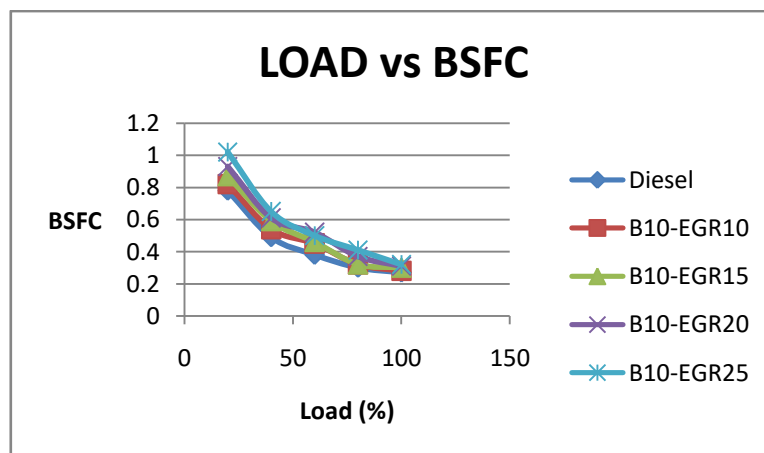


Fig 3: LOAD vs BSFC

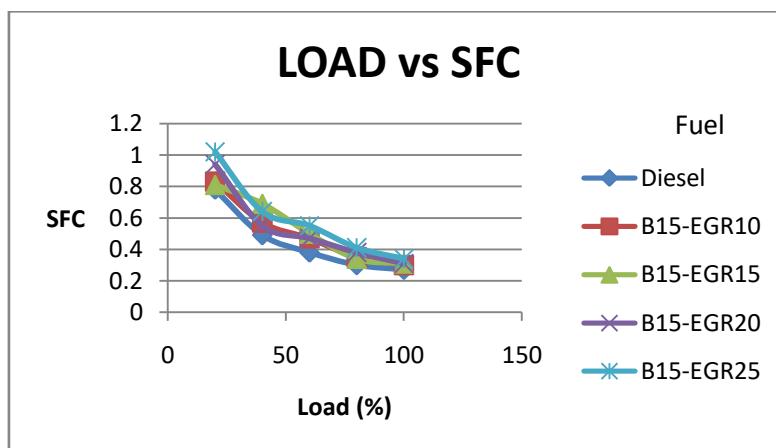


Fig 2: LOAD vs SFC

It is clear from the above graph that gradual decrease in the specific fuel consumption is absorbed as load percentage increase ultimately drop in specific fuel consumption is seen in the graphs. Similarly the graph plotted with B15 and varying EGR percentage, the below graph is plotted between load and nitrogen oxide and analysis is done as drop is nitrogen oxide is found in graphical representation.

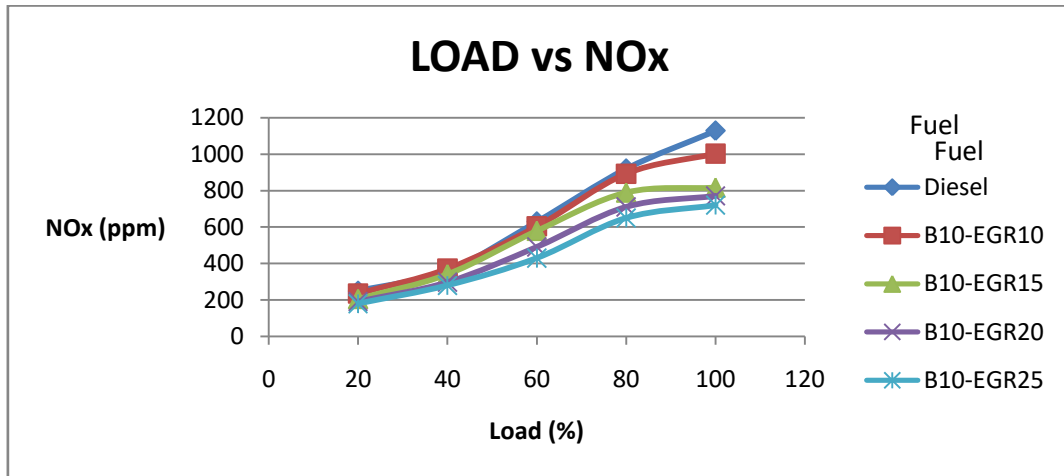


Fig 5: LOAD vs NOx

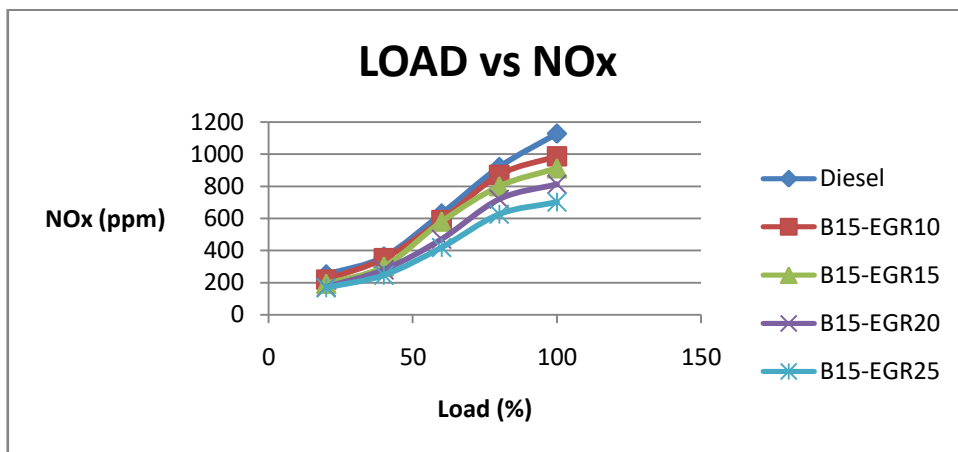


Fig 6: LOAD vs NOx

From the graph it quite clear that about 62.2% of nitrogen oxide is found in the graphical representation. As most of the focus is kept on reduction of nitrogen oxide eventually it has been archived. Similarly the graph plotted with B15 and varying EGR percentage, the below graph is plotted between load and unburned hydrocarbons and analysis is done as increase is unburned hydro carbons is found in graphical representation.

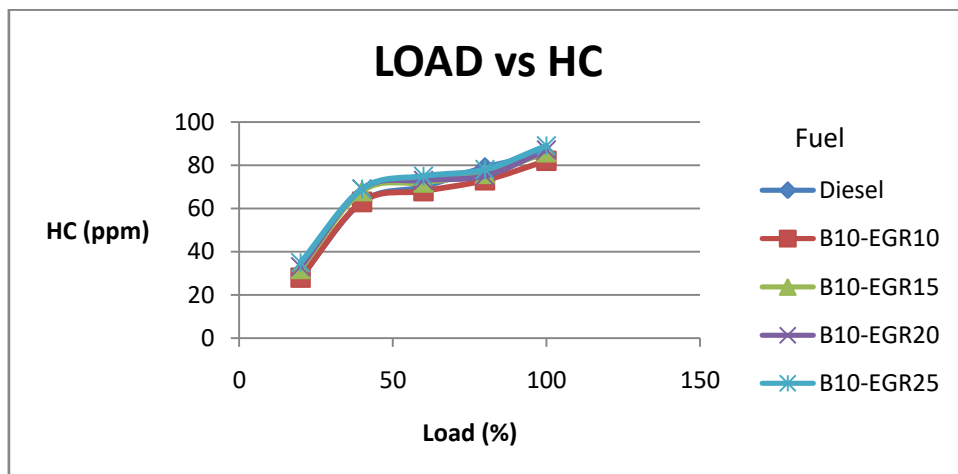


Fig 7: LOAD vs NOx

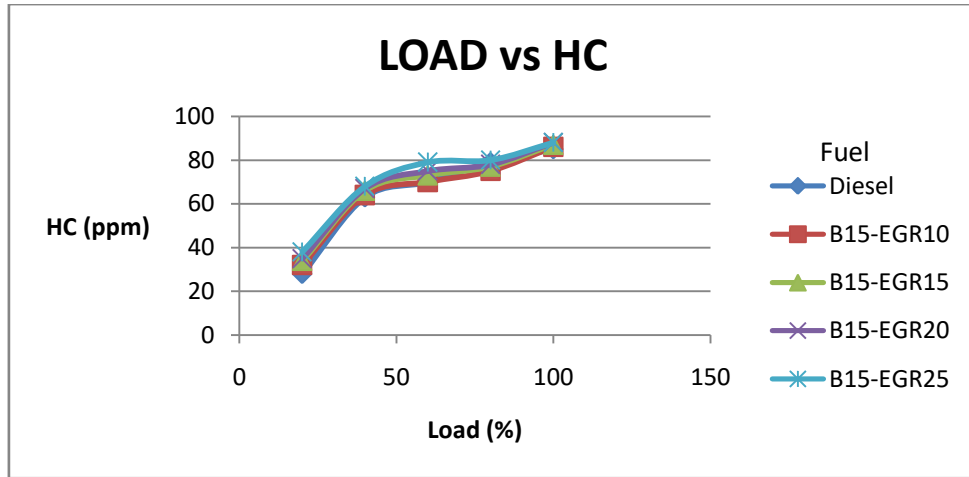


Fig 8: LOAD vs HC

As affect that amount of oxygen content is reduced in combustion chamber as inclusion of EGR percentage it effect the combustion is some sort way, that's the reason it is quite clear that unburned hydrocarbon are increased gradually as EGR percent as load increased.

Similarly the graph plotted with B15 and varying EGR percentage, the below graph is plotted between load and nitrogen oxide and analysis is done as drop in nitrogen oxide is found in graphical representation.

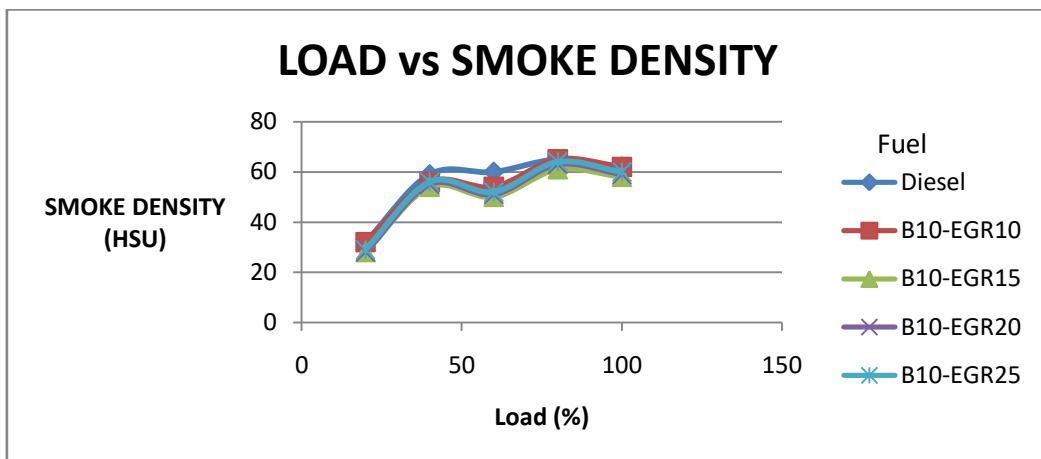


Fig 9: LOAD vs SMOKE DENSITY

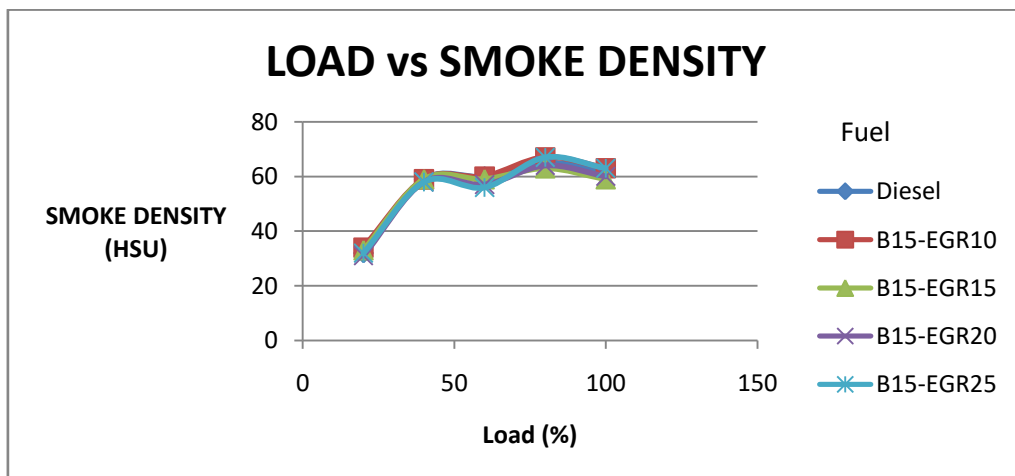


Fig 10: LOAD vs SMOKE DENSITY

As load increases smoke density increased till around 40% of load then started decreasing gradually till 80% of load and started increasing and gradually decreased.

Similarly the graph plotted with B15 and varying EGR percentage, the below graph is plotted between load and nitrogen oxide and analysis is done as drop in nitrogen oxide is found in graphical representation.

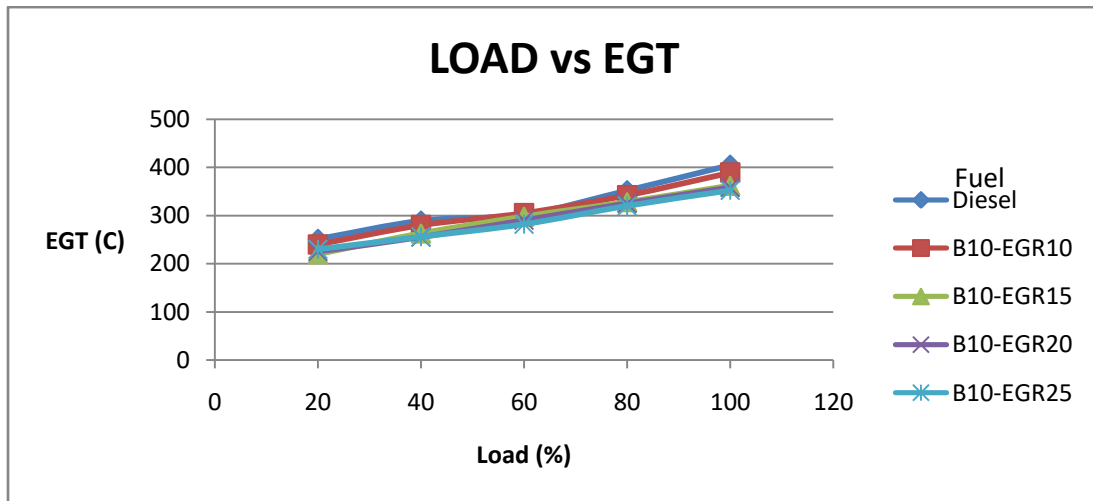


Fig 11: LOAD vs EGT

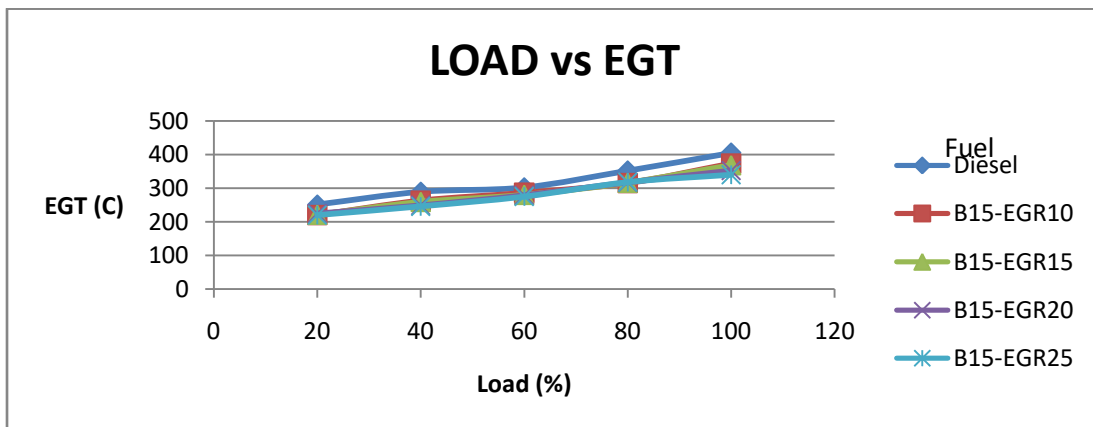


Fig 12: LOAD vs EGT

As oxygen percentage is reduced due to increase in percentage of EGR it is help full to get or attain reduced combustion as exhaust gas sent to the chamber has less temperature compare tip inside exhaust temperature thus reduction exhaust gas temperature is archived as EGR percent is increased as load increases.

CONCLUSION

From the profound experimental investigation on Common Rail Direct Injection Engine coupled with EGR has extracted summarised conclusion in following steps.

- Collective effects of both Exhaust Gas Recirculation and Cotton seed Biodiesel reduced the NO_x by 37.9% when compared to standard fuel Diesel.
- Carbon monoxide has increased as EGR percentage increased gradually in the experimentation compare to Diesel fuel.
- Unburned hydrocarbons are also increased as EGR percentage increases due to lack of oxygen content in the combustion chamber.
- Break thermal efficiency also reduced slightly when EGR percentage increased, it found that 7.8% of break thermal efficiency is reduced.
- As emission is the major concern, through this experimental investigation NO_x has reduced approximately 40% by using maximum EGR percentage that is 25%.

REFERENCES

[1]. Pramanik, K. 2003. "Properties and use of jatropha curcass oil and diesel fuel blends in compression ignition engine." *Renew Energy* 28(2):239-248. Doi: 10.1016/S0960-1481(02)00027-7.

- [2]. Tanzer, E., K. Y. Murat, Y. Hasan, A. Mevlüt, and S. Seda. 2014. "Determination of the Fuel Properties of Cottonseed Oil Methyl Ester and Its Blends with Diesel Fuel." *International Journal of Automotive Engineering and Technologies* 3(2):79 DOI: 10.18245/ijaet.90992.
- [3]. Durairaj, R. B., A. Anderson orcid Icon, G. Mageshwaran, B. Joseph, and M. Balamurali. 2017. "Performance and Emission characteristics of cotton seed and neem oil biodiesel with CeO₂ additives in a single-cylinder diesel engine." *International Journal of AmbientEnergy*, 40:4, 396-400, DOI: 10.1080/01430750.2017.1392352
- [4]. Gülüm, M., M. K. Yesilyurt, and A. Bilgin.2020. "The modeling and analysis of transesterification reaction conditions in the selection of optimal biodiesel yield and viscosity." *Environ SciPollut Res* 27, 10351–10366 <https://doi.org/10.1007/s11356-019-07473-0>.
- [5]. Naga, S.,M.Shailaja,A.V. Sita Rama Raju, and K. K.Radha. 2010. "Optimization of injection pressure for compression ignition engine with cotton seed oil as an alternate fuel." *International Journal of Engineering, Science and Technology* Vol. 2, No. 6, 2010, pp. 142-149
- [6]. Murat, K. Y. 2020. "A detailed investigation on the performance, combustion, and exhaust emission characteristics of a diesel engine running on the blend of diesel fuel, biodiesel and 1-heptanol (C7 alcohol) as a next-generation higher alcohol." *Fuel*, Volume 275, 117893.
- [7]. Rao Y.V.H, R. S. Voleti, A. V. S. Raju, and P. N. Reddy. 2009. "Experimental investigations on jatropha biodiesel and additive in diesel engine." *Indian J SciTechnol* 2(4):25-31.
- [8]. Jagadish, D., R.K. Puli, and k. M. Murthy. 2011. "The effect of supercharging on performance and emission characteristics of C.I. engine with diesel-ethanol-ester blends." *Thermal Sci*15(4):1165-1174doi: 10.2298/TSC1100513042J.
- [9]. Prabhakar, B.S., S.P. Laxmanrao, and K.J. Salim. 2013. "Investigation of Atomization and Cavitations Characteristics in Nozzle." *International Journal of Innovative Research in Science, Engineering and Technology*.2(11): 6200-6206.
- [10]. Indrareddy, K., K. Venkateswarlu, and K. Ramakrishna. 2020. "Experimental investigation of algae biofuel–diesel blends on performance of a CRDI diesel engine." *International Journal of Ambient Energy*DOI:10.1080/01430750.2020.1725630.